


The Blind Bolt brings exceptional qualities to the market in that it has transcended the first generation of blind fixings and fasteners become a product that is widely utilised throughout the construction industry. There aren't many fixing products which can change the way designers and architects think, but we can honestly state that about our blind bolts.

### Blind Bolt Product Specification – Zinc Flake 1000Hr SSP – Property Class 10.9

| Product Code  | Bolt Size  | Box Qty | Hole Diameter | Fixing Thickness Min | Fixing Thickness Max | Anchor Clearance | Depth Clearance | Minimum Hole Centres |
|---------------|------------|---------|---------------|----------------------|----------------------|------------------|-----------------|----------------------|
| BB0850DTASM   | M8 x 50    | 50      | 9             | 9                    | 24                   | 19               | 25              | 20                   |
| BB1060DTASM   | M10 x 60   | 40      | 11            | 10                   | 30                   | 23               | 30              | 20                   |
| BB1095DTASM   | M10 x 95   | 20      | 11            | 25                   | 65                   | 23               | 30              | 20                   |
| BB10130DTASM  | M10 x 130  | 20      | 11            | 55                   | 100                  | 23               | 30              | 20                   |
| GBB30140DTASM | M30 x 140* | 5       | 32            | 27                   | 60                   | 65               | 72              | 75                   |

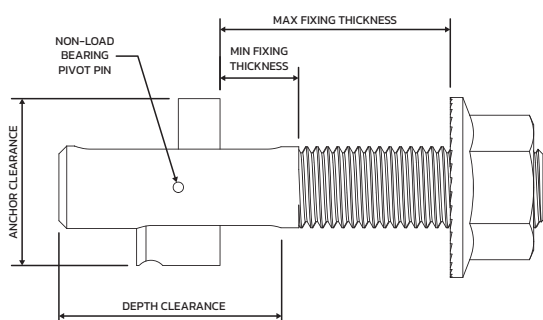

TECHNICAL DATA KEY



### Blind Bolt Product Specification – Hot Dip Galvanised – Property Class 10.9

| Product Code | Bolt Size  | Box Qty | Hole Diameter | Fixing Thickness Min | Fixing Thickness Max | Anchor Clearance | Depth Clearance | Minimum Hole Centres |
|--------------|------------|---------|---------------|----------------------|----------------------|------------------|-----------------|----------------------|
| BB1270HDG    | M12 x 70   | 20      | 13            | 12                   | 35                   | 26               | 35              | 25                   |
| BB12120HDG   | M12 x 120  | 25      | 13            | 30                   | 85                   | 26               | 35              | 25                   |
| BB12180HDG   | M12 x 180  | 20      | 13            | 80                   | 140                  | 26               | 35              | 25                   |
| GBB1475HDG   | M14 x 75*  | 20      | 15            | 14                   | 35                   | 32               | 38              | 32                   |
| GBB14125HDG  | M14 x 125* | 20      | 15            | 28                   | 82                   | 32               | 38              | 32                   |
| GBB14185HDG  | M14 x 185* | 20      | 15            | 75                   | 142                  | 32               | 38              | 32                   |
| GBB1690HDG   | M16 x 90*  | 20      | 17            | 13                   | 43                   | 36               | 43              | 35                   |
| GBB16130HDG  | M16 x 130* | 15      | 17            | 40                   | 75                   | 36               | 43              | 35                   |
| GBB16180HDG  | M16 x 180* | 10      | 17            | 55                   | 125                  | 36               | 43              | 35                   |
| GBB20110HDG  | M20 x 110* | 10      | 22            | 21                   | 56                   | 44               | 56              | 48                   |
| GBB20140HDG  | M20 x 140* | 8       | 22            | 21                   | 86                   | 44               | 56              | 48                   |
| GBB20180HDG  | M20 x 180* | 10      | 22            | 80                   | 120                  | 44               | 56              | 48                   |
| GBB20250HDG  | M20 x 250* | 10      | 22            | 130                  | 185                  | 44               | 56              | 48                   |
| GBB24130HDG  | M24 x 130* | 5       | 26            | 21                   | 62                   | 53               | 64              | 60                   |



\* = We strongly recommend the use of our installation gauges when installing these bolts!

## Blind Bolt Design Capacities – NZS 3404:1997 or AS 4100:1998

The design values for the shear capacity  $\phi V_f$  and tension capacity  $\phi N_{tf}$  of Blind Bolts given in the following table may be used in conjunction with designs completed to NZS 3404:1997 or AS 4100:1998.

| Diameter | Tension Capacity<br>$\phi N_{tf}$ (kN) | Shear Capacity Over Thread<br>$\phi V_{f(threads)}$ (kN) | Shear Capacity Over Slot<br>$\phi V_{f(slot)}$ (kN) | Recommended Tightening Torque (Nm) |
|----------|--|--|---|------------------------------------|
| M8       | 6.9                                    | 14.6   | 11.1  | 15                                 |
| M10      | 12.9                                   | 23.2   | 19.0  | 24                                 |
| M12      | 18.8                                   | 33.7   | 26.3  | 30                                 |
| M16      | 40.1                                   | 62.7   | 51.5  | 50                                 |
| M20      | 57.8                                   | 97.9   | 76.1  | 65                                 |
| M24      | 82.3                                   | 141.0  | 105.4   | 75                                 |

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections


The bearing capacity of the ply should be calculated in accordance with the design Standard, based on the nominal diameter  $d_f$  of the bolt. No reduction for the slot is necessary.

Bolts subject to combined shear and tension should be verified in accordance with the design Standard, using the values of  $\phi V_{f(slot)}$  and  $\phi N_{tf}$  from the table above.

The above design values were prepared by SCI, UK, following a program of tests. Design values verified by HERA, NZ are shown below.

| Diameter | Tension Capacity<br>$\phi N_{tf}$ (kN) | Shear Capacity Over Slot<br>$\phi V_{f(slot)}$ (kN) |
|----------|--|---|
| M10      | 12.0                                   | 20.6  |
| M20      | 63.7                                   | 122.5   |
| M24      | 86.7                                   | 202.6   |

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections

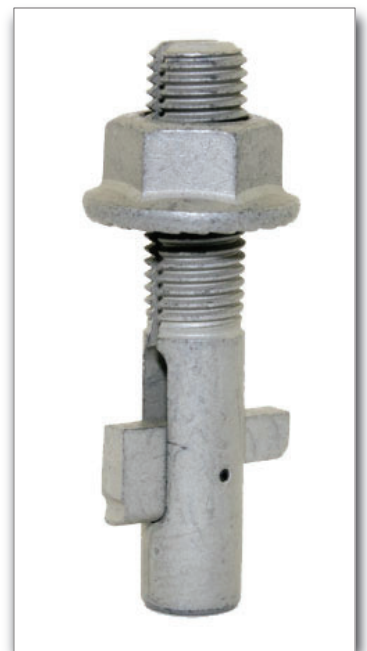


### Blind Bolt Product Specification – Stainless Steel A4-70

| Product Code   | Bolt Size  | Box Qty | Hole Diameter | Fixing Thickness Min | Fixing Thickness Max | Anchor Clearance | Depth Clearance | Minimum Hole Centres |
|----------------|------------|---------|---------------|----------------------|----------------------|------------------|-----------------|----------------------|
| BB0850A4ASM    | M8 x 50    | 50      | 9             | 9                    | 24                   | 19               | 25              | 20                   |
| BB1060A4ASM    | M10 x 60   | 40      | 11            | 10                   | 30                   | 23               | 30              | 20                   |
| BB1290A4ASM    | M12 x 90   | 20      | 13            | 12                   | 55                   | 26               | 35              | 25                   |
| GBB16100A4ASM* | M16 x 100* | 20      | 17            | 13                   | 53                   | 36               | 43              | 35                   |



\* = We strongly recommend the use of our installation gauges when installing these bolts!

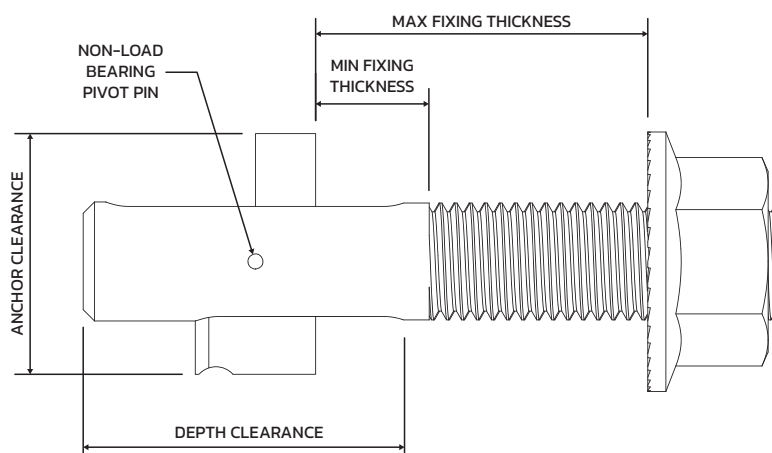

TECHNICAL DATA KEY



### Stainless Steel Blind Bolt – Design to BS 5950

| Diameter | Tension Capacity<br>$P_t$ (kN) | Shear Capacity Over Thread<br>$P_s$ , thread (kN) | Shear Capacity Over Slot<br>$P_s$ , slot (kN) | Bearing Capacity in 10mm Plate |                    | Recommended Tightening Torque (Nm) |
|----------|--------------------------------|---|---|--------------------------------|--------------------|------------------------------------|
|          |                                |   |   | S275<br>$P_b$ (kN)             | S355<br>$P_b$ (kN) |                                    |
| M8       | 5.3                            | 10.3  | 6.5   | 20.7                           | 24.8               | 15                                 |
| M10      | 12.7                           | 16.2  | 11.1  | 27.6                           | 33.0               | 22                                 |
| M12      | 21.4                           | 23.6  | 15.4  | 32.2                           | 38.5               | 28                                 |
| M16      | 42.8                           | 44.0  | 30.1  | 46.0                           | 55.0               | 45                                 |

These capacities are suitable for design to BS 5950-1 and can be compared directly with factored loads. Bearing resistances for different thicknesses can be calculated by scaling the values given in proportion to the thickness, but should only be used when the end distance is greater than  $2d$ .

Bolts subject to combined tension and shear should satisfy the following expression:

$$\frac{F_s}{P_s} + \frac{F_t}{P_t} \leq 1.4$$

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections

### Stainless Steel Blind Bolt – Design to BS EN 1993-1-8

| Diameter | Tension Capacity<br>$F_{t,Rd}$ (kN) | Shear Resistance Over Thread<br>$F_{v,Rd}$ , thread (kN) | Shear Capacity Over Slot<br>$F_{v,Rd}$ , slot (kN) | Bearing Capacity in 10mm Plate |                         | Recommended Tightening Torque (Nm) |
|----------|-------------------------------------|--|--|--------------------------------|-------------------------|------------------------------------|
|          |                                     |  |  | S275<br>$F_{b,Rd}$ (kN)        | S355<br>$F_{b,Rd}$ (kN) |                                    |
| M8       | 5.3                                 | 12.3   | 7.8  | 65.6                           | 75.2                    | 15                                 |
| M10      | 12.7                                | 19.5   | 13.3   | 82.0                           | 94.0                    | 22                                 |
| M12      | 22.0                                | 28.3   | 18.4   | 98.4                           | 112.8                   | 28                                 |
| M16      | 42.9                                | 52.8   | 36.1   | 131.2                          | 150.4                   | 45                                 |

These design resistances are suitable for design to BS EN 1993 and can be compared directly with design loads. The quoted bearing resistances assume  $k_1 = 2.5$  and  $\alpha_b = 1.0$ . For different arrangements the bearing resistance should be calculated using the expression in Table 3.4 of BS EN 1993-1-8, with  $d$  as the nominal diameter of the blind bolt.

Bolts subject to combined tension and shear should satisfy the following expression:

$$\frac{F_{v,Ed}}{F_{v,Rd}} + \frac{F_{t,Ed}}{1.4F_{t,Rd}} \leq 1.0$$

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections