


BLIND RIVETS

DOMED & CSK HEAD - ALUMINIUM STEEL

ALUMINIUM STEEL

ALUMINIUM ALLOY RIVETS WITH STEEL MANDRELS

Available in Domed Head (R73AS) or Countersunk Head (R72AS)

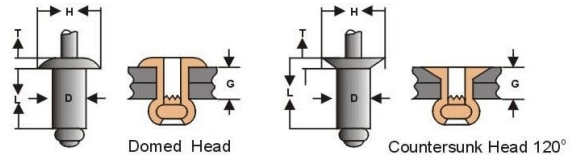

RIVET CODE	RIVET DIAMETER D (MM)	HOLE SIZE (MM)	RIVET LENGTH L (MM)	GRIP RANGE G (MM)	HEAD DIAMETER H (MM)	HEAD THICKNESS T (MM)	STANDARD STRENGTH N (MIN.)	
							SHEAR	TENSILE
32 34 36	2.4mm	2.5 - 2.6	6.0 9.2 12.4	0.8 - 3.2 3.2 - 6.4 6.4 - 9.5	4.52 - 5.03	0.81	300	350
41 42 43 44 45 46 48 410 412	3.2mm	3.3 - 3.4	5.1 6.7 8.2 9.7 11.4 13.0 16.2 19.4 22.2	0.5 - 1.6 1.6 - 3.2 3.2 - 4.8 4.8 - 6.4 6.4 - 7.9 7.9 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1	6.05 - 6.65	1.02	535	650
52 53 54 55 56 58 510 512	4.0mm	4.1 - 4.2	7.3 8.9 10.5 12.0 13.6 16.8 20.0 22.5	0.8 - 3.2 3.2 - 4.8 4.8 - 6.4 6.4 - 7.9 7.9 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1	7.52 - 8.33	1.27	850	1020
62 63 64 65 66 68 610 612 614 616	4.8mm	4.9 - 5.0	8.0 9.5 11.1 12.7 14.3 17.5 20.7 23.8 27.0 30.2	0.8 - 3.2 3.2 - 4.8 4.8 - 6.4 6.4 - 7.9 7.9 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1 19.1 - 22.2 22.2 - 25.4	9.04 - 10.01	1.52	1160	1420
82 84 86 88 810 812 814 816	6.4mm	6.5 - 6.6	9.2 12.4 15.5 18.7 21.9 25.1 28.2 31.4	0.8 - 3.2 3.2 - 6.4 6.4 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1 19.1 - 22.2 22.2 - 25.4	12.07 - 13.34	2.03	2050	2500