









FORTRESS[®]
FASTENERS

**Timber & Metal Self
Drilling Screws**

www.fortress.kiwi

Fortress Catalogues Now Available

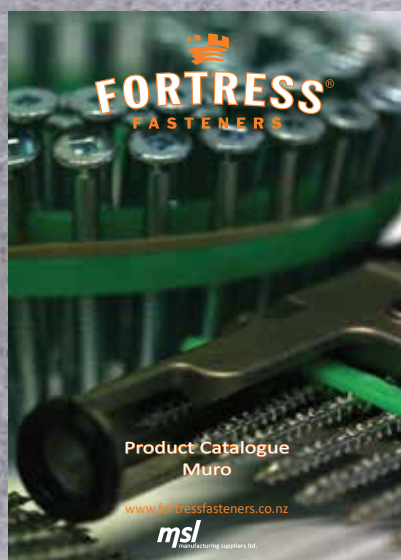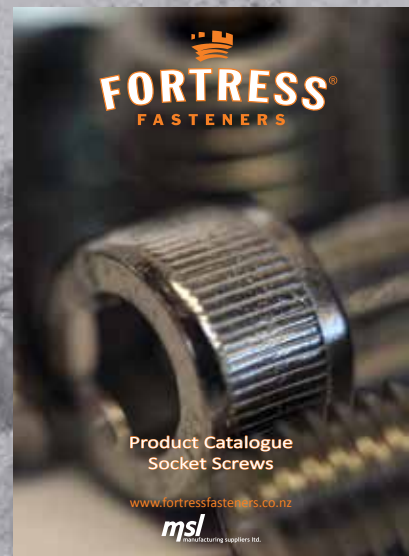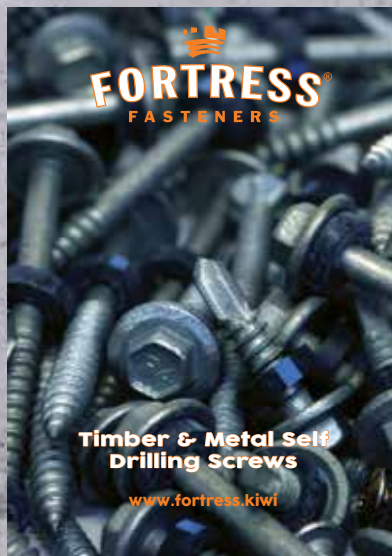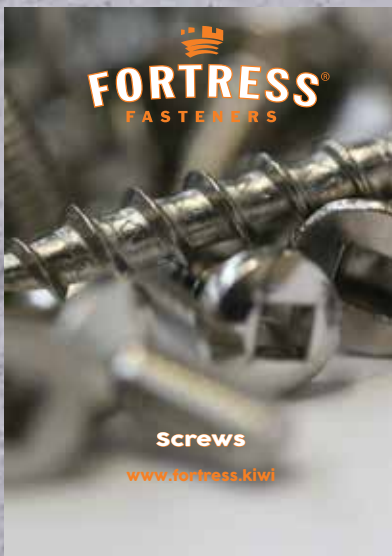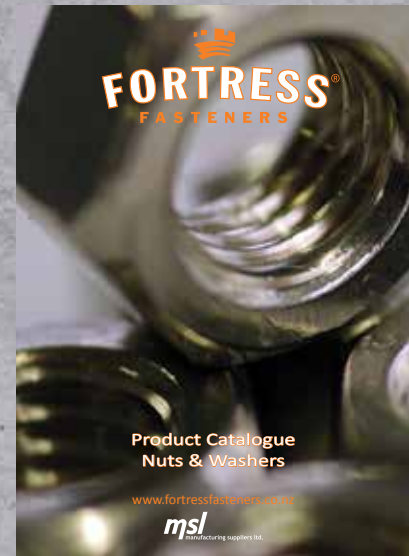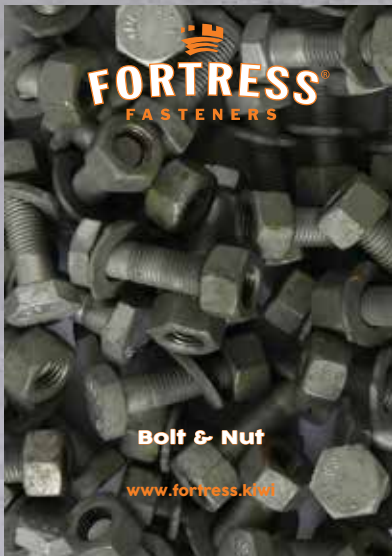



Manufacturing Suppliers Ltd (MSL) began business in 1980 as a small operation in New Lynn, Auckland and is now one of New Zealand's leading fastener suppliers. We have grown dramatically in the past thirty years and now employ over one hundred people who continue our company vision - to meet industry demands for a range of quality fasteners backed by a dependable service.

Now a wholly owned subsidiary of Steel & Tube Holdings Ltd, we take pride in supporting the New Zealand economy, and can now offer a full range of steel solutions in partnership with Steel & Tube.

Our substantial growth since the eighties has included the introduction of 9 branches nationwide. Fortress has developed into a house hold name across many kiwi industries. Our local management means we understand the local market and have the ability to make decisions rapidly and easily. Large enough to meet the demands of any customer, we are still small enough to offer the personal touch.

With our network of fully-stocked branches carrying over 300 million items and 17,000 product lines. This makes us arguably the largest fastening wholesaler in the country. Our new products, creative packaging and merchandising initiatives have also earned us a reputation as industry innovators.

We owe our success to our ability to deliver on time and in full to a wide customer base in manufacturing industries, the building trade and to building supplies merchants in New Zealand.

This, combined with the strength of our own Fortress brand and our exceptional customer service is what makes MSL a market leader.

Our national management means we understand the local market and have the ability to make decisions rapidly and easily. Large enough to meet the demands of any customer, we are still small enough to offer the personal touch.

Branch Network

Auckland (Head Office)

560 Rosebank Road, Avondale
Phone 09 828 2777
Fax 09 828 2424

Albany

Unit 4, 4 William Pickering Drive
Phone 09 414 7620
Fax 09 414 7410

Hamilton

51 Vickery Street, Te Rapa
Phone 07 850 8434
Fax 07 850 5696

Mount Maunganui

7 Newton Street
Phone 07 575 0508
Fax 07 575 0557

Hastings

199 St. Aubyn Street West
Phone 06 873 3311
Fax 06 873 3315

New Plymouth

25 Hurlstone Drive, Waiwhakaiho
Phone 06 8248950 or 06 8248951
Fax 06 7574391

Palmerston North

94 Kaimanawa Street
Phone 06 355 5990
Fax 06 355 5880

Wellington

6 Regent Street, Petone
Phone 04 586 2300
Fax 04 586 2600

Christchurch


66 Hammersmith Drive, Sockburn
Phone 03 343 6740
Fax 03 343 6741




Contents


P6	Wall Chart
P7	Website
P8	Durability Legend
P9	Durability Class Breakdown
P10	Screw Points
P11	Icon Legend
P12	Specifications - Hex Washer Face T17 Screws
P13	Hex Washer Face T17 Screws
P14	Hex Washer Face T17 Screws Stainless Steel
P15	Specifications - Hex Washer Face Self Drilling Screws
P16	Hex Washer Face Self Drilling Screws
P17	Hex Washer Face Self Drilling Screws Stainless Steel
P18	Supadrive Roofing Screws SDS
P19	Wingtek SDS Self Embedding Screws
P20	Wafer Head SDS Screws
P21	Button Head SDS Screws
P22	Rapid Tool & Screws
P24	Specifications - Bugle Head Batten & Purlin Screws
P25	Bugle Head Batten & Purlin Screws
P26	Blue Screws
P28	SDS Gypsum Screws
P29	DECK-IT
P30	DECK-IT Decking Screw Range

New Wall Chart Available!






Don't stick it!
Bostik it!




PROUDLY NEW ZEALAND OWNED & OPERATED

- LUBRICANTS
- CLEANERS
- COATINGS
- MARKERS
- FOOD GRADE



Klingspor
Klingspor Technology



Make the Switch...

JUST A **SMALL** SAMPLE OF OUR RANGE

www.fortress.kiwi 0800 42 52 62

Auckland (Head Office)
560 Rosebank Road, Avondale
Phone 09 828 2777
Fax 09 828 2424
Email sales.akl@fortress.kiwi

Albany
Unit 4, 4 William Pickering Drive
Phone 09 414 7620
Fax 09 414 7410
Email sales.albany@fortress.kiwi

Hamilton
51 Vickery Street, Te Rapa
Phone 07 850 8434
Fax 07 850 5696
Email sales.ham@fortress.kiwi

Mount Maunganui
7 Newton Street
Phone 07 575 0508
Fax 07 575 0557
Email sales.mount@fortress.kiwi

Hastings
199 St. Aubyn Street West
Phone 06 873 3311
Fax 06 873 3315
Email sales.hastings@fortress.kiwi

New Plymouth
25 Hurlstone Drive, Waiwhakaho
Phone 06 8248950 or 06 8248951
Fax 06 7574391
Email sales.np@fortress.kiwi

Palmerston North
94 Kaimanawa Street
Phone 06 355 5990
Fax 06 355 5880
Email sales.pn@fortress.kiwi

Wellington
6 Regent Street, Petone
Phone 04 586 2300
Fax 04 586 2600
Email sales.wgtn@fortress.kiwi

Christchurch
66 Hammersmith Drive, Sockburn
Phone 03 343 6740
Fax 03 343 6741
Email sales.chch@fortress.kiwi

0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170 180 190 200 210 220 230 240 250 260 270 280 290 300 310 320 330 340 350 360 370 380 390 400 410 420 430 440 450 460 470 480 490 500 510 520 530 540 550 560 570 580 590 600 610 620 630 640 650 660 670 680 690 700 710 720 730 740 750 760 770 780 790 800 810 820 830 840 850 860 870 880 890 900 910 920 930 940 950 960 970 980 990 1000

mm

0 1 2 3 4 5 6 7 8 9 10 11 12


inches

Download now at
www.fortress.kiwi

6

www.fortress.kiwi

Brand New Fortress Website

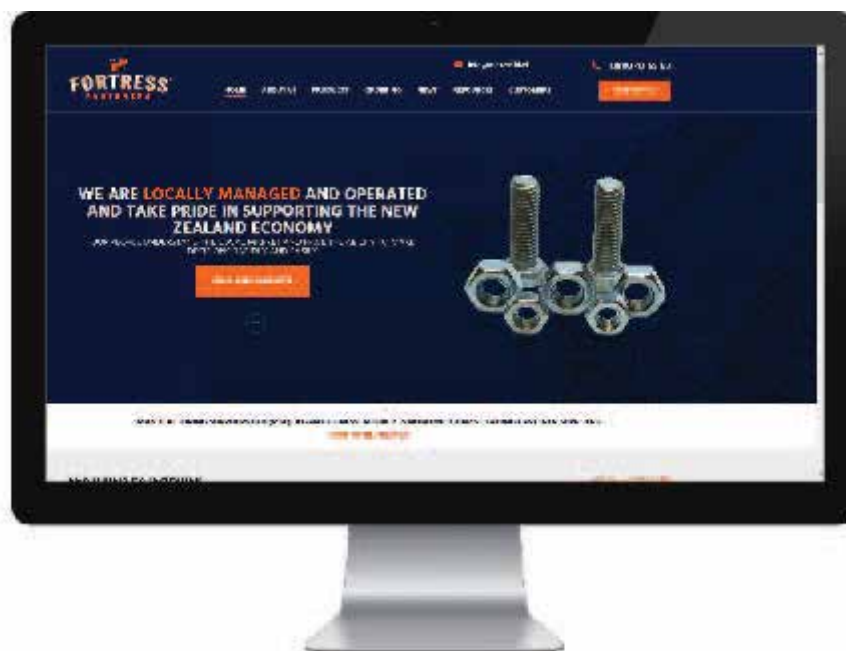

Online Ordering!
Search and view range.
View pricing.
View and download technical information.
Keep up to date with industry developments.

Durability Icon Legend



Zinc - Internal use



Zinc Chromate - Internal use



Class 4 - External use




Galvanised - External use



T304 Stainless Steel - External use



T316 Stainless Steel - External and Marine use

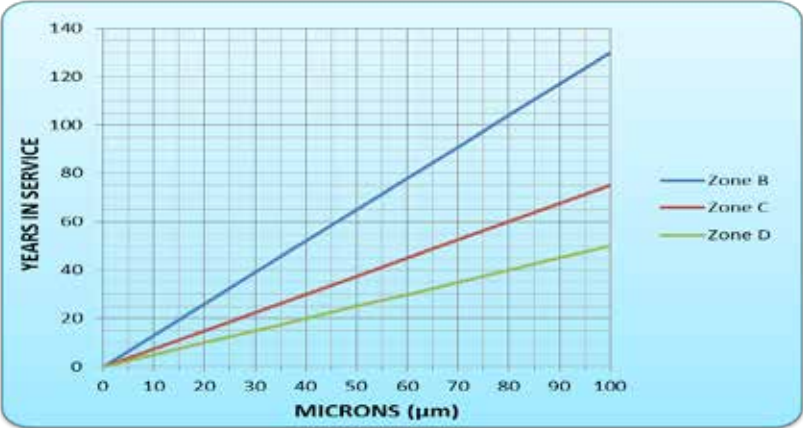

Category	Coating Type	Coating Thickness (µm)	Standard
CLASS: 1	Electro Plated Zinc	4	AS 1791
CLASS: 2	Electro Plated Zinc	12	AS 1791
CLASS: 2	Mechanically Plated Zinc	17	AS 1791
CLASS: 3	Electro Plated Zinc	30	AS 1791
CLASS: 3	Mechanically Plated Zinc	40	AS 1791
CLASS: 3	Hot Dipped Galvanised	30	AS 1791
CLASS: 4	Mechanically Plated Zinc	45	AS 1791
CLASS: 4	Hot Dipped Galvanised	50	AS 1791
HDG	Hot Dipped Galvanised	84	AS 1214 / AS 4680

Exposure Zone Descriptions

Zone B: Low

Inland areas with little risk from wind blown sea-spray salt deposits.

Zone C: Medium

Inland costal areas with medium risk from wind blown sea-spray salt deposits. This covers mainly coastal areas with relatively low salinity. The extent of the affected area varies significantly with factors such as winds, topography and vegetation.

Zone D: High

Coastal areas with high risk of wind blown sea-spray deposits. This is defined as within 500m of the sea including harbours or 100m from tidal estuaries and sheltered inlets. This also includes all offshore islands.

Durability class Breakdown

CL 3

Class 3 - External use

Class 3 is good for general external use in mild industrial and marine applications. The class is intended for roofing and cladding screws in mild applications.

Class 3 is determined by achieving 1000 SST - 1000 Salt Spray Test hours.

Class three (CL3) and Class four (CL4) are forms of mechanically plated steel that sit between the common Zinc plated and Galvanised coatings in terms of durability.

Plating is 25-30 microns thick.

EC

E-Coat

E-Coat finish has a similar life span to Class 3 but is electrically plated.

BR

Blue Ruspert

Ruspert also has a similar durability to Class 3. Ruspert coating is a processing of metal surface treatment. It provides high performance of corrosion resistance. The coating including 3 layers. Base coating is metallic zinc layer, then the second chemical conversion film layer, finally a baked ceramic surface coating.

CL 4

Class 4 - External use

Class 4 is mechanically plated and rated to 1500 SST.

For external use in marine and moderately severe corrosive environments, generally within 1 kilometre from marine surf, although topography and /or strong prevailing winds may extend this distance.

Plating is 30-40 microns thick.

CL 5

Class 5 - External use


Class 5 is also mechanically plated but there is currently no national standard to adhere to. Class 5 fasteners are measured on real world testing as opposed to plating tickness.

Requires 2000 hours SST or greater to be rated to Class 5.

Always consult with your Fortress fastening specialist to get the best fastener to suit.


Compliance is to be assessed through real world testing "when testing at an approved outdoor test site there shall be no red rust present on the significant surfaces of 95% of the fasteners tested". These outdoor test sites must be located less than 500m from the mean high water line, in a coastal area with surf for most of the year.

Screw Points selection Guide




TYPE B

This point is applied to self tapping screws and generally specified where the screw is being driven into a shallow hole. Type B points provide for more full threads to be engaged in the material being fastened.




TYPE 17

Similar to the Type AB point, except that the screw material has been cut away. This feature, some times called a shank shot provides the ability for the screw to self drill through thin metal and then drill into timber members of the structure.



WINGED DRILL

In thicker building materials such as plywood, hardboard or cement sheet, the addition of wings cuts a slightly oversize hole permitting clear passage of the thread to engage with supporting steel structural members.



DRILL

A point designed to fasten material of varying types to steel. The shape of the drill point gives the fastener the ability to drill its own hole in most materials including steel.

Icon Legend



Drill Diameter



Embedment Depth



Material Thickness



Pack Size



Bulk Size



Driver Type and Size



Hex Drive Size




Across Face Head Width



Screw Gauge (size)

Hex Washer Face T17 Screws

Specifications



SPECIFICATIONS					
THREAD DIAMETER	12G	5.4MM	SURFACE HARDNESS	46-56 HRC	
	14G	6.4MM	CORE HARDNESS	32-40 HRC	
SOCKET DRIVE	12G	5/16"	TORSIONAL STRENGTH	12G	9.4Nm
	14G	3/8"		14G	14.1Nm
	RECOMMENDED DRILL SPEED 1000 RPM				

MANUFACTURED TO NZS / AS3566.2
MATERIAL C1022

Durability
Yellow Zinc: 3-5 Microns
Recommended for indoor use only


Class 4: 45 Microns
(75% Zinc - 25% Tin)
Typical Life 25-50 Years

Sealing Washer
Dekseal® Trueblue® EPDM

T17 Screw Hex Washer Face

Zinc Chromate


Class 4

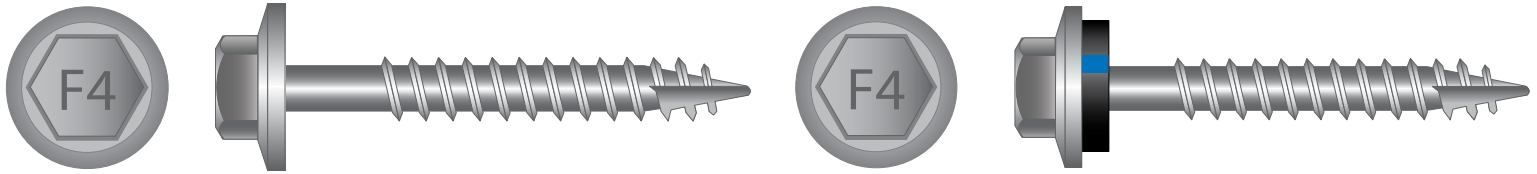

PART # - NO NEO	PART # - NO NEO	PART # - NEO	SIZE	HEAD	MT(mm)	PACK QTY
TT1225C2	TT1225C4	TT1225NC4	12-14 X 25	HEX 5/16	1.00-4.50	200
	TT1235C4	TT1235NC4	12-14 X 35	HEX 5/16	1.00-4.50	200
	TT1240C4		12-14 X 40	HEX 5/16	1.00-4.50	200
TT1245C2	TT1245C4	TT1245NC4	12-14 X 45	HEX 5/16	1.00-4.50	200
TT1250C2	TT1250C4	TT1250NC4	12-14 X 50	HEX 5/16	1.00-4.50	200
	TT1255C4	TT1255NC4	12-14 X 55	HEX 5/16	1.00-4.50	200
TT1265C2	TT1265C4	TT1265NC4	12-14 X 65	HEX 5/16	1.00-4.50	100
	TT1425C4		14-10 X 25	HEX 3/8	1.00-5.00	100
TT1450C2	TT1450C4	TT1450NC4	14-10 X 50	HEX 3/8	1.00-5.00	100
	TT1455C4		14-10 X 55	HEX 3/8	1.00-5.00	100
TT1465C2	TT1465C4	TT1465NC4	14-10 X 65	HEX 3/8	1.00-5.00	100
	TT1475C4	TT1475NC4	14-10 X 75	HEX 3/8	1.00-5.00	100
	TT1490C4	TT1490NC4	14-10 X 90	HEX 3/8	1.00-5.00	100
TT14100C2	TT14100C4	TT14100NC4	14-10 X 100	HEX 3/8	1.00-5.00	100
	TT14115C4	TT14115NC4	14-10 X 115	HEX 3/8	1.00-5.00	100
	TT14125C4		14-10 X 125	HEX 3/8	1.00-5.00	100
	TT14150C4		14-10 X 150	HEX 3/8	1.00-5.00	100
	TT14200C4		14-10 X 200	HEX 3/8	1.00-5.00	100

T17 Screw Hex Washer Face


T304 Stainless Steel

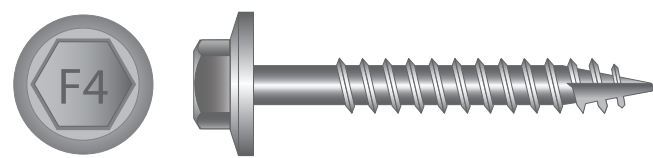

PART # - NO NEO	SIZE	HEAD	ME(mm)	PACK QTY
TTX1225	12-14 X 25	HEX 5/16	23	200
TTX1235	12-14 X 35	HEX 5/16	30	200
TTX1238	12-14 X 38	HEX 5/16	30	200
TTX1245C4	12-14 X 45	HEX 5/16	30	200
TTX1250C4	12-14 X 50	HEX 5/16	30	200
TTX1265C4	12-14 X 65	HEX 5/16	30	100
TTX1275C4	12-14 X 75	HEX 5/16	30	100
TTX1425C4	14-14 X 25	HEX 3/8	23	100
TTX1432C4	14-14 X 32	HEX 3/8	28	200
TTX1438C4	14-14 X 38	HEX 3/8	30	200
TTX1445C4	14-14 X 45	HEX 3/8	35	200
TTX1450C4	14-14 X 50	HEX 3/8	35	100
TTX1455C4	14-14 X 55	HEX 3/8	35	100
TTX1465C4	14-14 X 65	HEX 3/8	35	100
TTX1475C4	14-14 X 75	HEX 3/8	35	100
TTX1490C4	14-14 X 90	HEX 3/8	35	100
TTX14125C4	14-14 X 125	HEX 3/8	35	100

Hex Washer Face Self Drilling Screws

Specifications



SPECIFICATIONS					
THREAD DIAMETER	8G	4.2MM	SURFACE HARDNESS	51-58 HRC	
	10G	4.8MM	CORE HARDNESS	32-40 HRC	
	12G	5.4MM			
	14G	6.4MM			
SOCKET DRIVE	8G	1/4"	TORSIONAL STRENGTH (MIN)	8G	4.7 Nm
	10G	5/16"		10G	7.0 Nm
	12G	5/16"		12G	9.4 Nm
	14G	3/8"		14G	14.1 Nm
DRILL DEPTH CAPACITY	8G (18 TPI)	2.5MM	MIN FORCE FOR WITHDRAWAL	10G	2.5 kN
	10G (16 TPI)	4.5MM		12G	2.8 kN
	12G (14 TPI)	4.5MM		14G	3.1 kN
	12G (24TPI)	5.3MM			
	14G (10TPI)	3.0MM			
	14 (20TPI)	6.3MM			

MANUFACTURED TO NZS / AS3566.2
MATERIAL C1022



Durability
Class 4: 45 Microns
(75% Zinc - 25% Tin)
Typical Life 25-50 Years

Sealing Washer
Dekseal® Trueblue® EPDM

SDS Screw Hex Washer Face

Zinc Chromate


Class 4

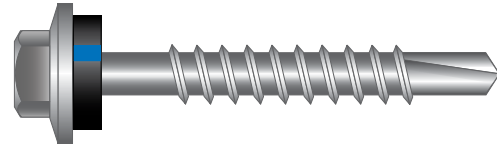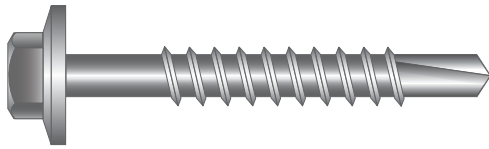

PART # No Neo	PART # No Neo	PART # With Neo	SIZE	HEAD	MT(mm)	PACK QTY
TK812C2	TK812C4		8-18 X 12	HEX 1/4	0.75-2.5	1000
	TK816C4		8-18 X 16	HEX 1/4	0.75-2.5	1000
	TK820C4		8-18 X 20	HEX 1/4	0.75-2.5	1000
TK1016C2	TK1016C4	TK1016NC4	10-16 X 16	HEX 5/16	0.75-3.50	1000
TK1025C2	TK1025C4	TK1025NC4	10-16 X 25	HEX 5/16	0.75-3.50	500
TK1220C2	TK1220C4	TK1220NC4	12-14 X 20	HEX 5/16	1.00-4.50	200
	TK1225C4	TK1225NC4	12-14 X 25	HEX 5/16	1.00-4.50	200
	TK1235C4	TK1235NC4	12-14 X 35	HEX 5/16	1.00-4.50	200
TK1245C2	TK1245C4	TK1245NC4	12-14 X 45	HEX 5/16	1.00-4.50	200
	TK1255C4	TK1255NC4	12-14 X 55	HEX 5/16	1.00-4.50	200
	TK1265C4	TK1265NC4	12-14 X 65	HEX 5/16	1.00-4.50	100
TK1422C2	TK1422C4	TK1422NC4	14-10 X 22	HEX 3/8	1.00-5.00	200
	TK1430C4		14-10 X 30	HEX 3/8	1.00-5.00	200
	TK1475C4	TK1475NC4	14-10 X 75	HEX 3/8	1.00-5.00	100
	TK1490C4	TK1490NC4	14-10 X 90	HEX 3/8	1.00-5.00	100
	TK14115C4	TK14115NC4	14-10 X 115	HEX 3/8	1.00-5.00	100
		TK14135NC4	14-10 X 135	HEX 3/8	1.00-5.00	100
		TK14150NC4	14-10 X 150	HEX 3/8	1.00-5.00	100

SDS Screw Hex Washer Face


T410 Hardened Stainless Steel



PART # No Neo	SIZE	HEAD	MT(mm)	PACK QTY
TKX1225T410	12-14 X 25	HEX 5/16	1.00-4.50	200
TKX1235T410	12-14 X 35	HEX 5/16	1.00-4.50	200
TKX1238T410	12-14 X 38	HEX 5/16	1.00-4.50	200
TKX1245T410	12-14 X 45	HEX 5/16	1.00-4.50	200
TKX1250T410	12-14 X 50	HEX 5/16	1.00-4.50	200
TKX1265T410	12-14 X 65	HEX 5/16	1.00-4.50	100
TKX1275T410	12-14 X 75	HEX 5/16	1.00-4.50	100
TKX1425T410	14-14 X 25	HEX 3/8	1.00-5.00	200
TKX1432T410	14-14 X 32	HEX 3/8	1.00-5.00	200
TKX1438T410	14-14 X 38	HEX 3/8	1.00-5.00	200
TKX1445T410	14-14 X 45	HEX 3/8	1.00-5.00	200
TKX1450T410	14-14 X 50	HEX 3/8	1.00-5.00	200
TKX1455T410	14-14 X 55	HEX 3/8	1.00-5.00	100
TKX1465T410	14-14 X 65	HEX 3/8	1.00-5.00	100
TKX1475T410	14-14 X 75	HEX 3/8	1.00-5.00	100
TKX1490T410	14-14 X 90	HEX 3/8	1.00-5.00	100
TKX14125T410	14-14 X 125	HEX 3/8	1.00-5.00	100

SDS SupaDrive Screw Hex Washer Face

Class 4

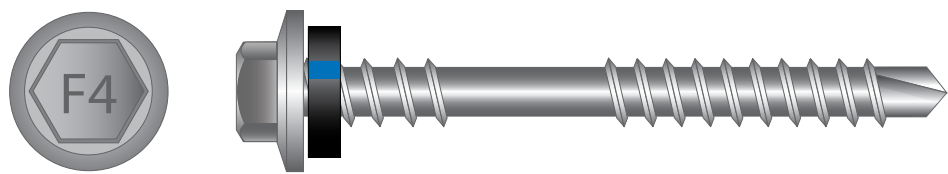

PART # - NEO	SIZE	HEAD	MT(mm)	PACK QTY
SD1225NC4	12g PLUS -13 X 25	HEX 5/16	1.00-4.50	200
SD1255NC4	12g PLUS -13 X 55	HEX 5/16	1.00-4.50	200
SD1265NC4	12g PLUS -13 X 65	HEX 5/16	1.00-4.50	100





Painted Colours available Ex Stock

Wingtek SDS Screw countersunk Head

Zinc Chromate


Class 4



PART #		SIZE	SQUARE	MT(mm)	PACK QTY
TKCWQ1035C2	TKCWQ1035C4	10-16 x 35mm	#2	0.75-3.50	200
TKCWQ1045C2	TKCWQ1045C4	10-16 x 45mm	#2	0.75-3.50	200
TKCWQ1050C2	TKCWQ1050C4	10-16 x 50mm	#2	0.75-3.50	100
TKCWQ1060C2	TKCWQ1065C4	10 -16 X 60/65mm	#2	0.75-3.50	100
TKCWQ1075C2	TKCWQ1075C4	10-16 x 75mm	#2	0.75-3.50	100

SDS Self Embed Screw countersunk


Zinc Chromate



PART #	SIZE	PHILLIPS	MT(mm)	PACK QTY
TKCR820C2	8G X 20mm	#2	0.75-2.50	1000
TKCR825C2	8G x 25mm	#2	0.75-2.50	1000
TKCR830C2	8G x 30mm	#2	0.75-2.50	1000

SDS Wafer Screw Wafer Head - Phillips


Zinc Chromate Class 4



PART #		SIZE	PHILLIPS	PACK QTY
TKW1016C2	TKW1016C4	10G X 16	#2	1000
TKW1022C2	TKW1022C4	10G X 22	#2	1000
TKW1030C2	TKW1030C4	10G X 30	#2	1000

SDS Wafer Screw Wafer Head - Square


Zinc Chromate Class 4



PART #		SIZE	SQUARE	PACK QTY
TKWQ812C2		8G X 12	#2	1000
TKWQ1016C2	TKWQ1016C4	10G X 16	#2	1000
TKWQ1022C2	TKWQ1022C4	10G X 22	#2	1000
	TKWQ1025C4	10G X 25	#2	1000
TKWQ1030C2	TKWQ1030C4	10G X 30	#2	1000

SDS Button Screw Wafer Button Head


Zinc Chromate

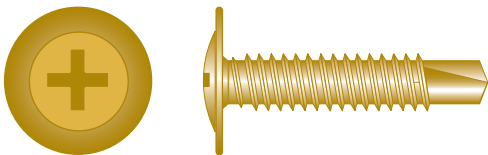

PART #	SIZE		PHILLIPS	PACK QTY
TKWB812C2	8G X 12		#2	1000
TKWB816C2	8G X 16		#2	1000
TKWB820C2	8G X 20		#2	1000
TKWB825C2	8G X 25		#2	1000

RAPID


AUTO-FEED SCREW SYSTEM

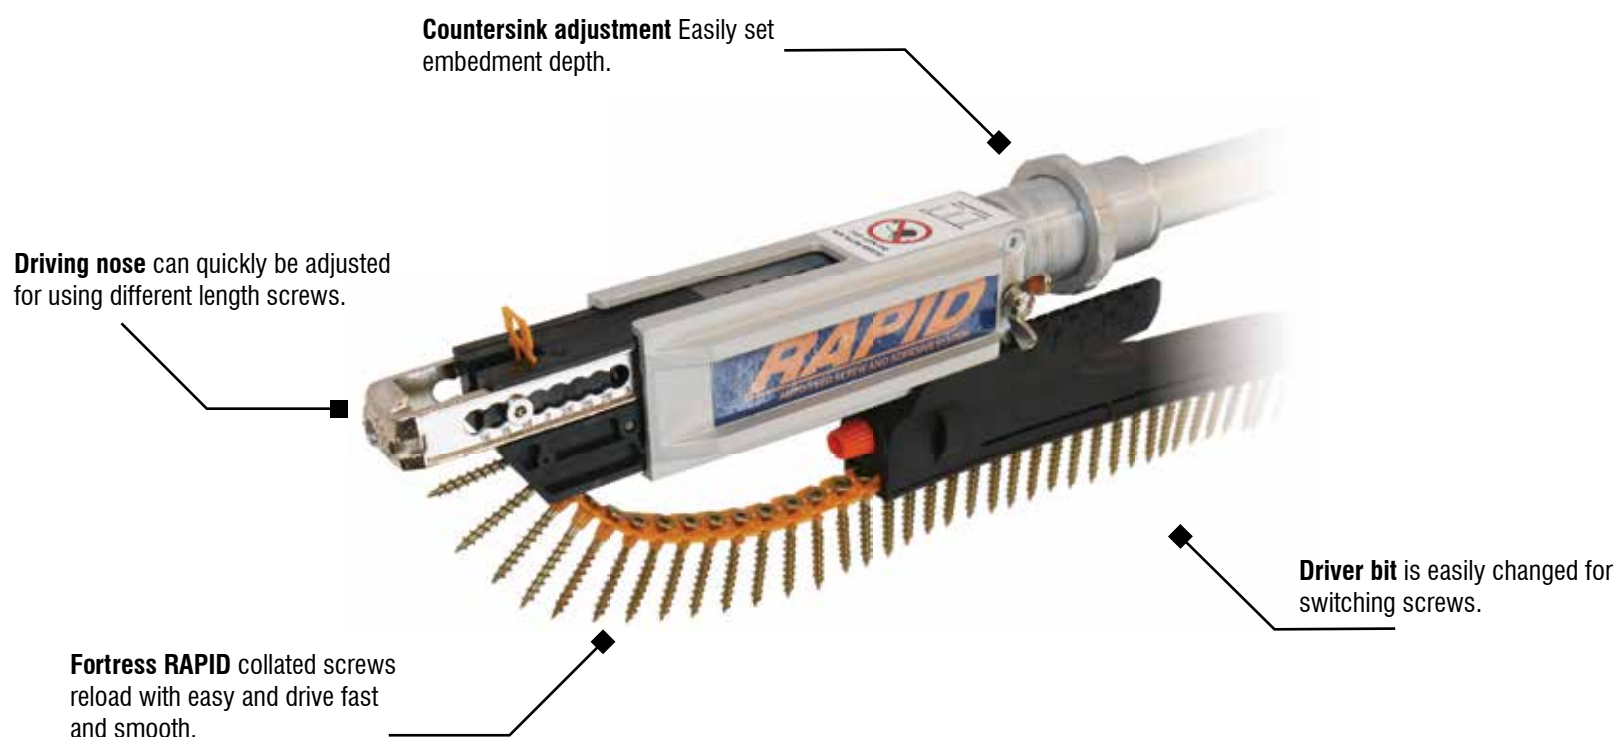

RAPID Collated Screws

Zinc Chromate

T316 Stainless Steel

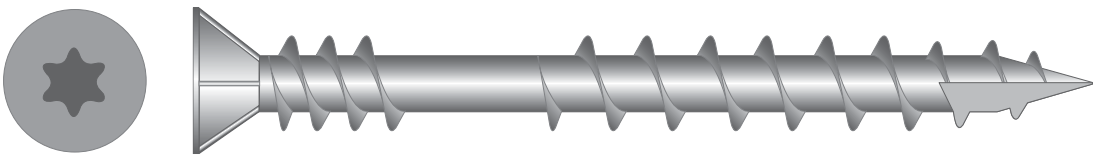

PART # - ZINC CHROMATE	PART # - T316	SIZE	PACK QTY
RAPID1050	RAPIDX1050	10G X 50 RAPID COLLATED TORX SCREW	2000
	RAPIDX1065	10G X 65 RAPID COLLATED TPRX	1000


RAPID - Auto Feed Screw System



PART #	DESCRIPTION	PACK QTY
RAPIDTOOLCL	RAPID AUTO FEED SCREW SYSTEM CORDLESS	1
RAPIDTOOL	RAPID AUTO FEED SCREW SYSTEM	1

Bugle Head Battan & Purlin Screws

Specifications



SPECIFICATIONS					
THREAD DIAMETER	14G	6.4MM	TORSIONAL STRENGTH	STEEL	14.1 Nm
				STAINLESS	8.0 Nm
HEAD DIAMETER	14MM				
HEX DRIVE BIT	5MM				
RECOMMENDED DRILL SPEED 1000 RPM					


Durability
Yellow Zinc: 3-5 Microns
Recommended for indoor use only

Class 4: 40 Microns
(75% Zinc - 25% Tin)
For outdoor use

Stainless Steel T316 A4 Grade
For outdoor use including coastal environments

T17 Batten Screw Bugle Head


Class 4
Stainless Steel T316
Zinc Chromate Class 4.6



PART #			SIZE	HEX mm	ED(mm)	PACK QTY
TTB1450C4	TTBX1450T	TTB1450C2	14G x 50mm	5	30	100
	TTBX1463T		14G x 63mm	5	30	100
TTB1475C4	TTBX1475T	TTB1475C2	14G x 75mm	5	35	100
	TTBX1490T		14G x 90mm	5	35	100
TTB14100C4	TTBX14100T	TTB14100C2	14G x 100mm	5	35	100
	TTBX14120T		14G x 120mm	5	35	100
TTB14125C4			14G x 125mm	5	35	100
TTB14150C4	TTBX14150T		14G x 150mm	5	35	100

T17 Batten Screw Bugle Head - Trade Packs

Class 4



PART #	SIZE	HEX mm	ED(mm)	PACK QTY
TTB14100C4P100	14G x 100mm	5	30	100
TTB14100C4P250	14G x 100mm	5	30	250
TTB14100C4P500	14G x 100mm	5	35	500



Fortress Purlin and Batten fixing screws

Meeting and beating national standards

10g X 80mm


**PURLIN
SCREWS**

Blue Ruspert

Fortress quality & strength


**Square Drive
Self Countersinking Head
T17 Tip**

Available in packs of 100 & 500

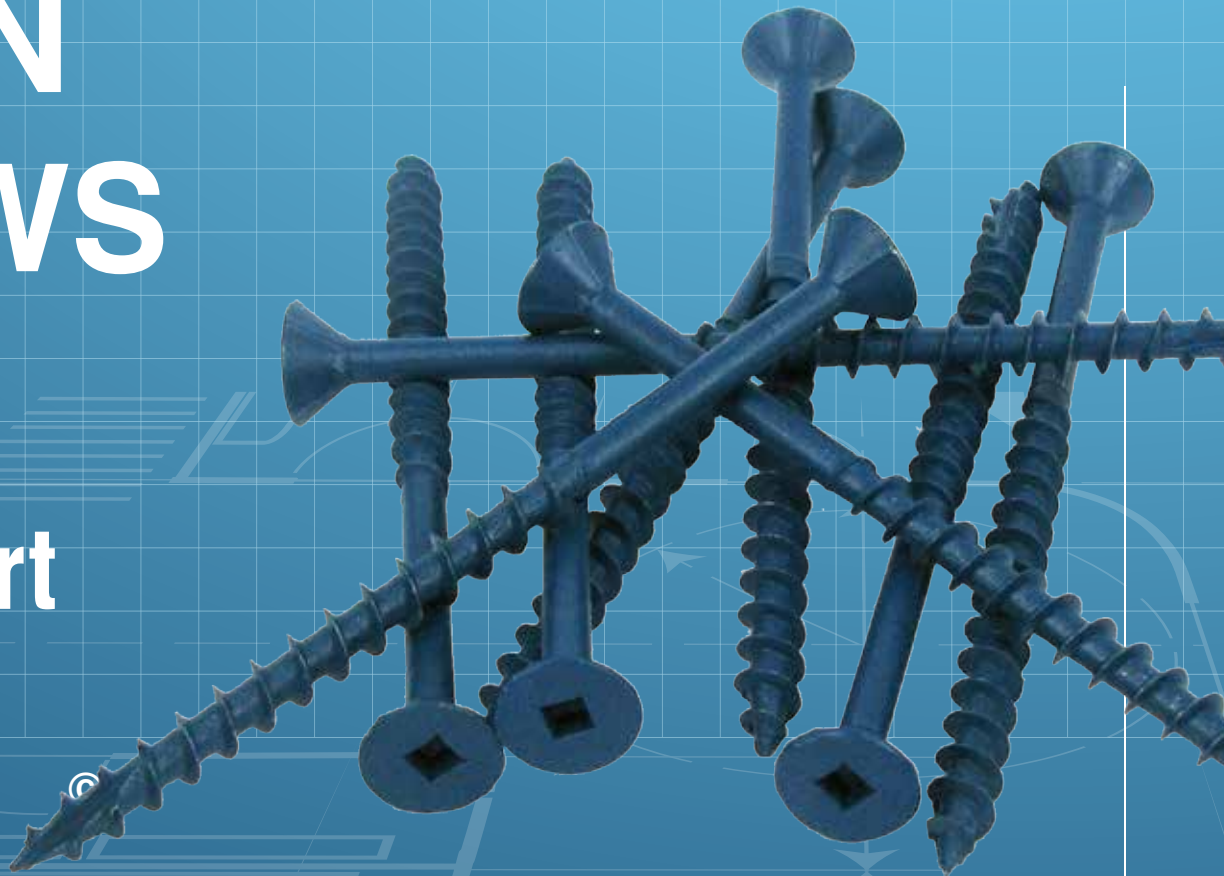


Purlin Blue Screw countersunk Head

Blue Ruspert

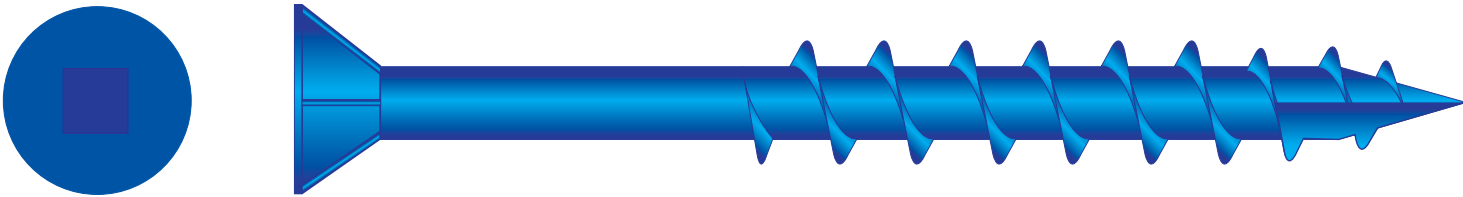


PART #	SIZE	SQUARE	PACK QTY
PUR1080BP500	10G x 80mm	#2	500
PUR1080BP100	10G x 80mm	#2	100


Performance Data

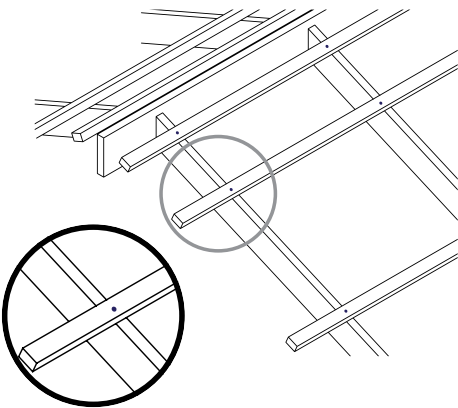

1 x FORTRESS BLUE RUSPERT
T17 PURLIN SCREW 10g X 100mm

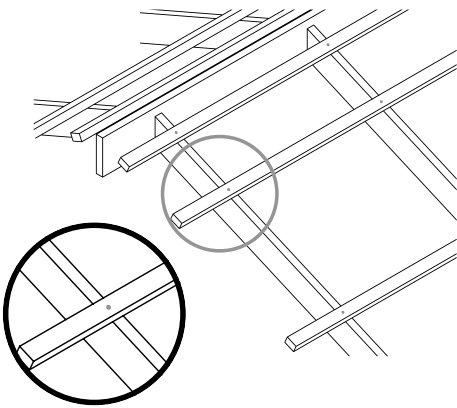

1 x FORTRESS BUGLE HEAD T17
PURLIN/BATTEN SCREW 14g X 100mm

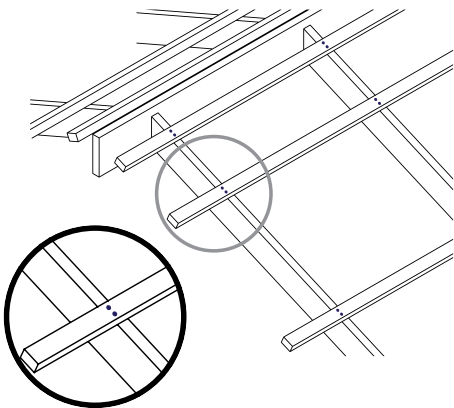

2 x FORTRESS BLUE RUSPERT
T17 PURLIN SCREW 10g X 100mm

Tested to: 3.7kN	Tested to: 5.5kN	Tested to: 7.07kN
----------------------------	----------------------------	-----------------------------

SDS Gypsum Screw Bugle Head


Zinc Chromate



PART #	SIZE	PHILLIPS	PACK QTY
TKGYP625	6G X 25mm	#1	1000
TKGYP632	6G x 32mm	#1	1000
TKGYP645	6G x 45mm	#1	1000

SDS Gypsum Screws Collated Bugle Head

Zinc Chromate

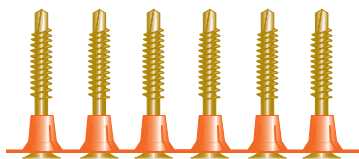

PART #	SIZE	PHILLIPS	PACK QTY
TKGYPCOL625	6G X 25mm	#1	1000
TKGYPCOL632	6G x 32mm	#1	1000
TKGYPCOL640	6G x 40mm	#1	1000


DECKIT



Decking Screws Raised Countersunk

T304 Stainless Steel

T316 Stainless Steel

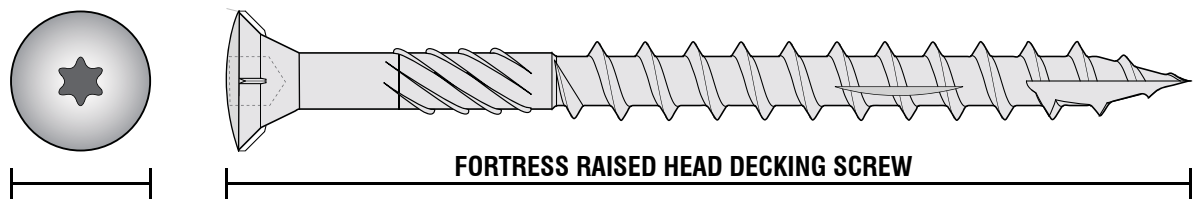

Torx drive for strong, fast, cam-out resistant fastening and a smart looking finish.

Double thread firmly embeds for a tight finish; reduces bowing of timbers.

Unique cutting system offers fast fixing into hardwood timber decking.

Square thread reduces resistance during installation.

WORKS WITH DEPTH SETTER

WORKS WITH SMART-BIT




QTY: 100



QTY: 1000

Decking Screws Raised Countersunk (Bronze)

BRONZED 304 Stainless Steel

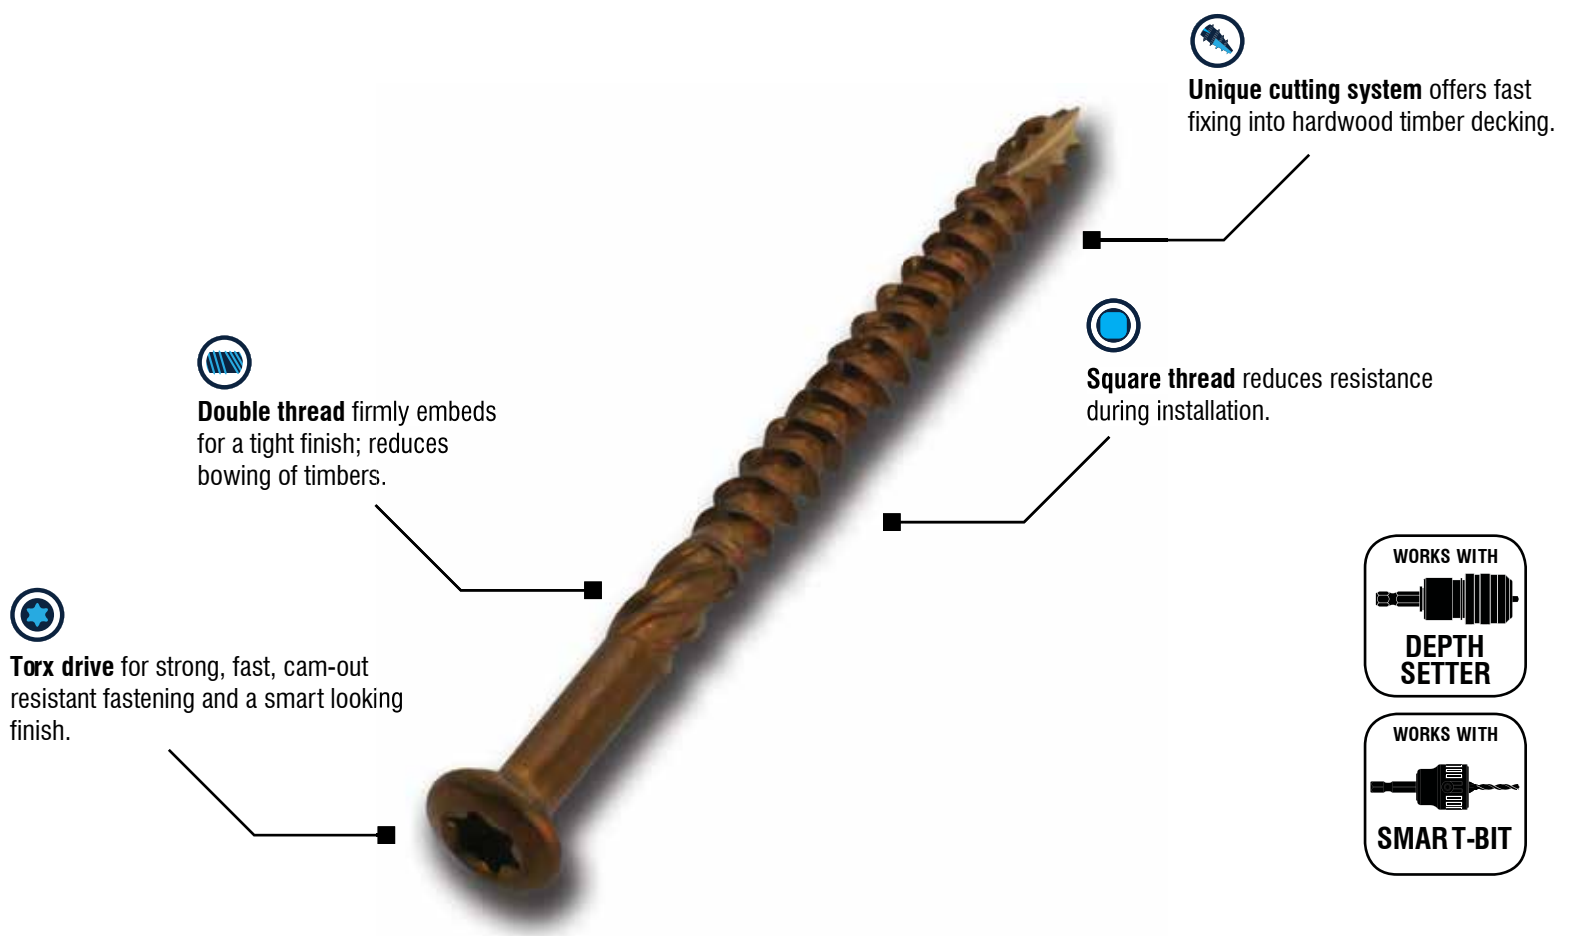

QTY: 100





QTY: 1000

Decking Screws Flush Countersunk


T304 Stainless Steel

T316 Stainless Steel

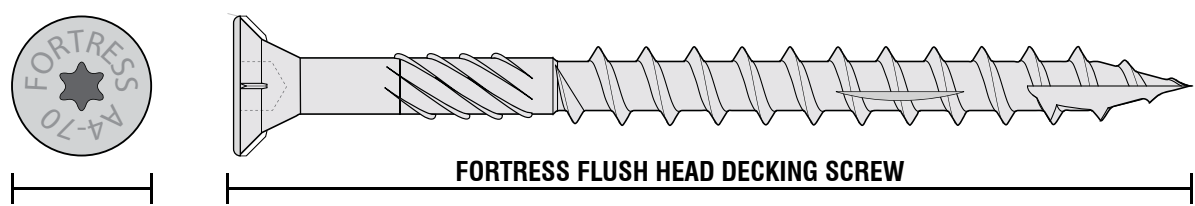





Torx drive for strong, fast, cam-out resistant fastening and a smart looking finish.



Double thread firmly embeds for a tight finish; reduces bowing of timbers.




Unique cutting system offers fast fixing into hardwood timber decking.




Square thread reduces resistance during installation.

WORKS WITH



DEPTH SETTER

WORKS WITH



SMART-BIT





QTY: 100



QTY: 1000


Decking Screws Flush Countersunk - Long

304 Stainless Steel

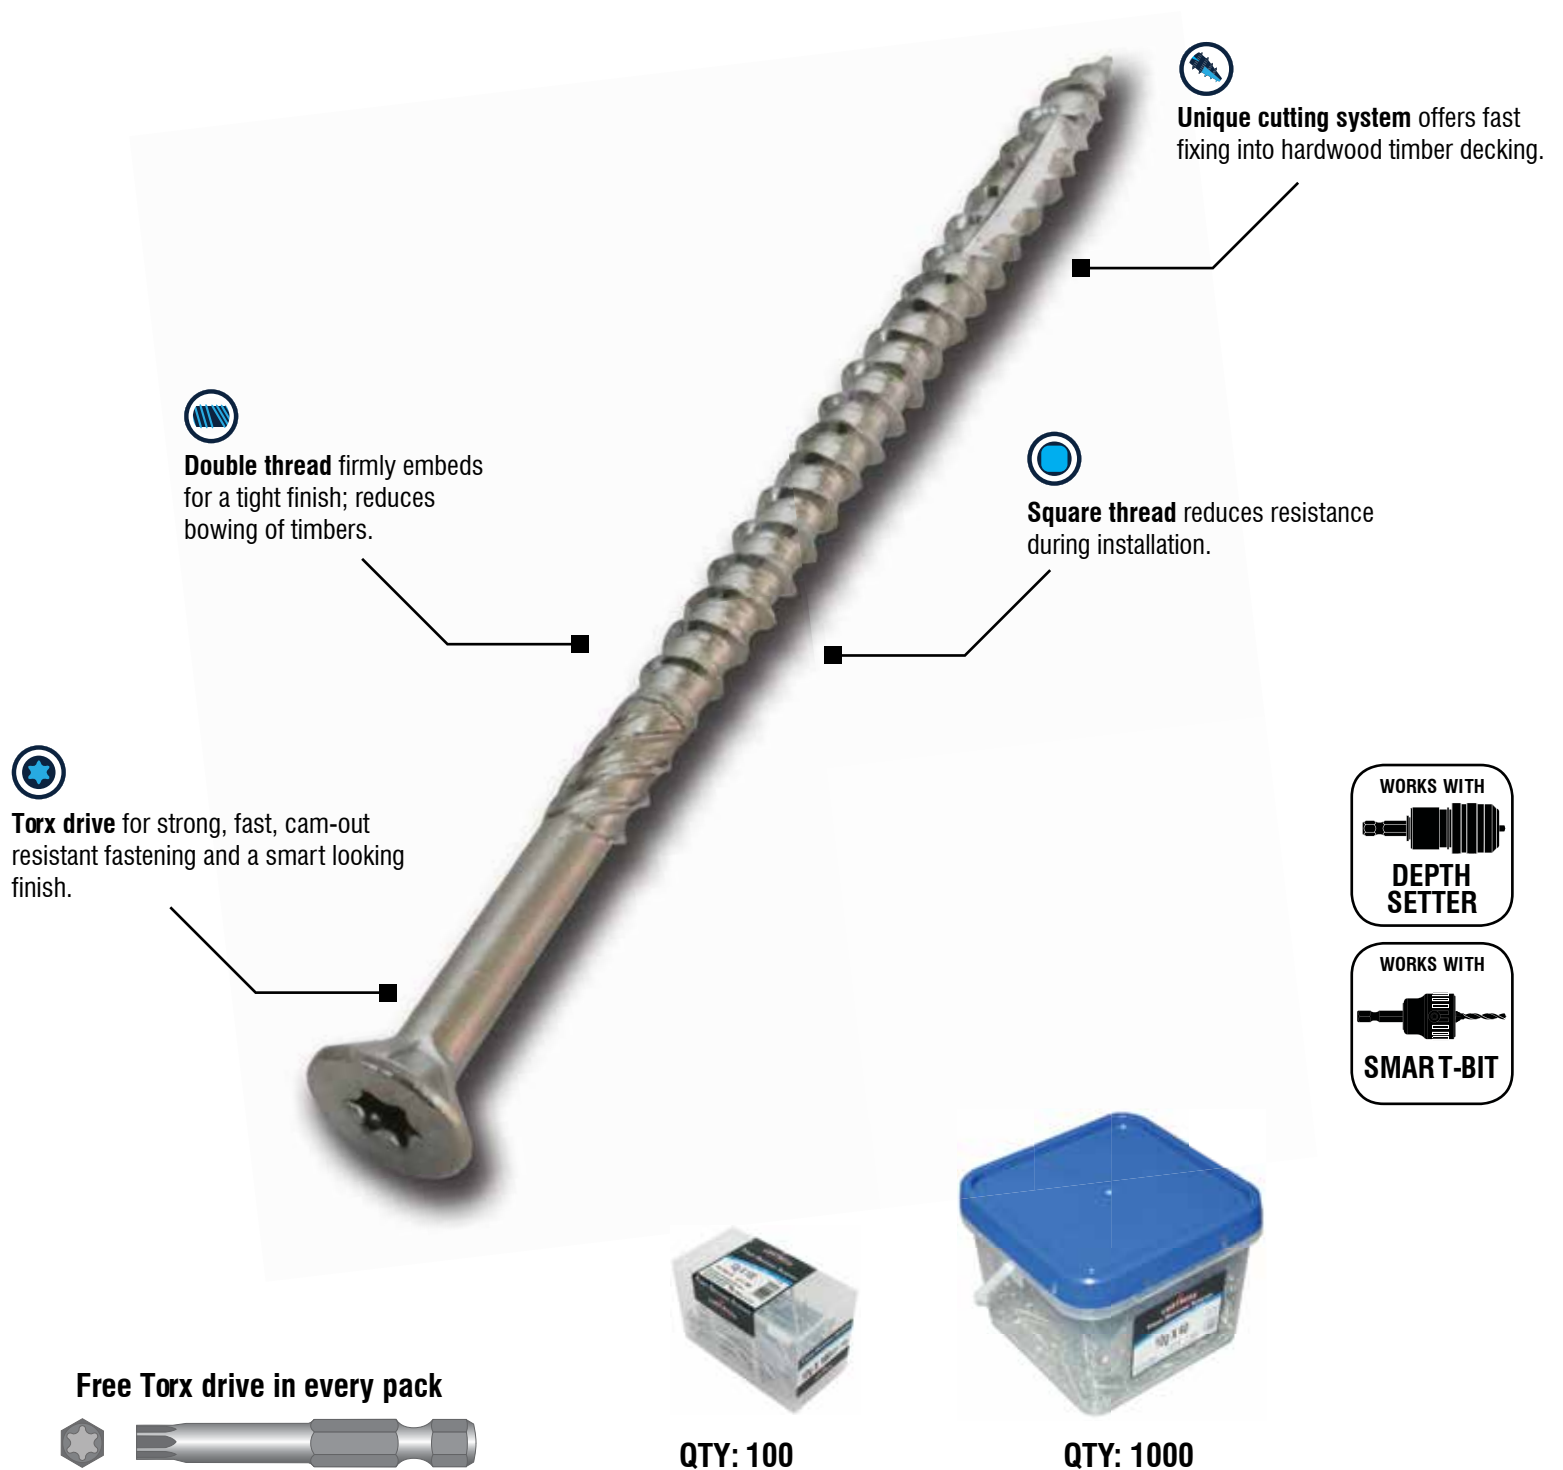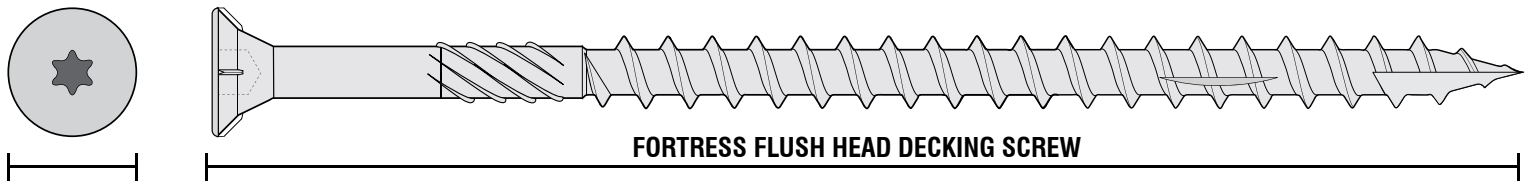


Screw Dimensions


8 Gauge

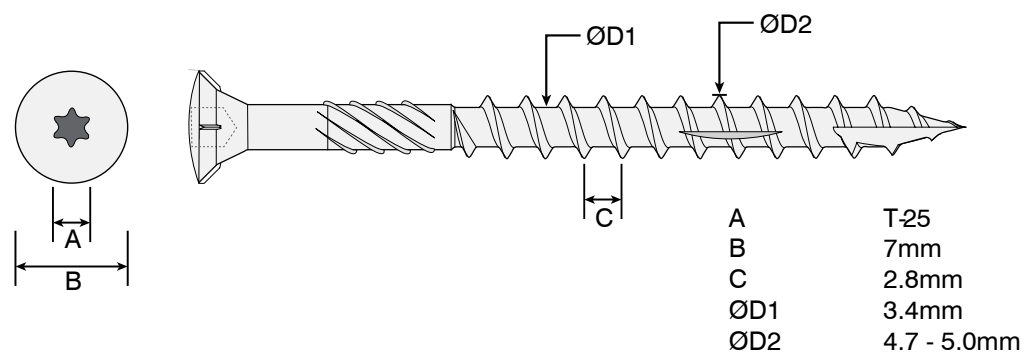

10 Gauge

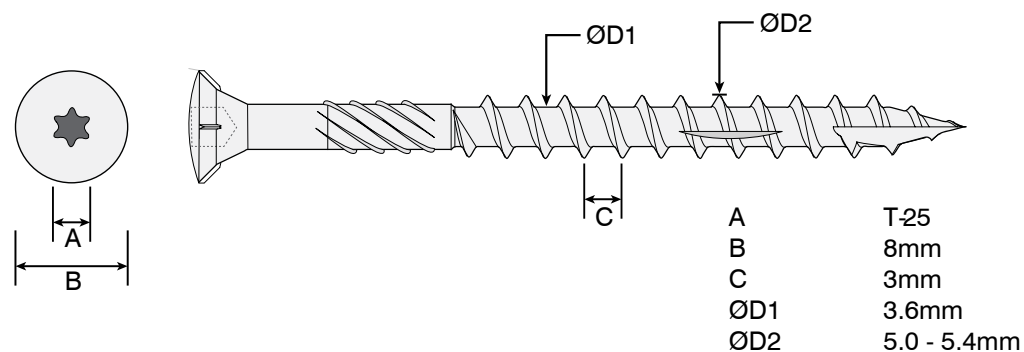

12 Gauge

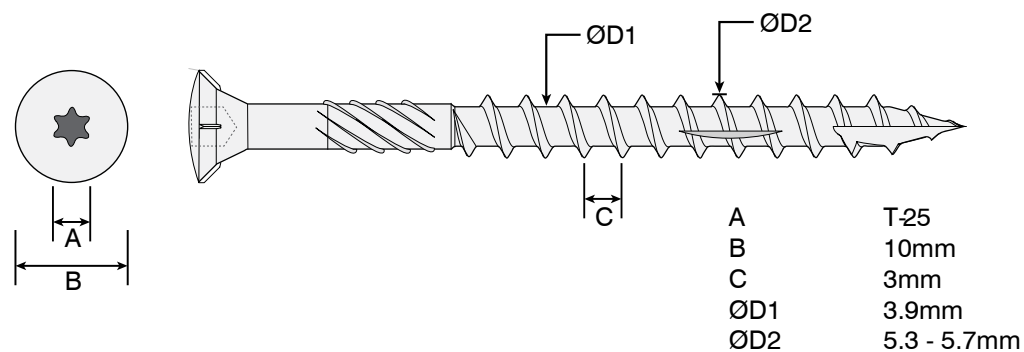

T304 Raised Csk



PART CODE	BOX CODE	DESCRIPTION	PACK QTY	BOX QTY
DECKX850P100	DECKX850P	8G X 50	100	1000
DECKX865P100	DECKX865P	8G X 65	100	1000
DECKX1060P100	DECKX1060P	10G X 60	100	1000
DECKX1075P100	DECKX1075P	10G X 75	100	1000
DECKX1275P100	DECKX1275P	12G X 75	100	1000
DECKX1290P100	DECKX1290P	12G X 90	100	1000

T316 Raised Csk

PART CODE	BOX CODE	DESCRIPTION	PACK QTY	BOX QTY
DECKX1060TP100	DECKX1060TP	10G X 60	100	1000
DECKX1075TP100	DECKX1075TP	10G X 75	100	1000
DECKX1275TP100	DECKX1275TP	12G X 75	100	1000
DECKX1290TP100	DECKX1290TP	12G X 90	100	1000

T304 Raised Csk (Bronze)

PART CODE	BOX CODE	DESCRIPTION	PACK QTY	BOX QTY
DECKX1060BR100	DECKX1060BR	10G X 60	100	1000
DECKX1075BR100	DECKX1075BR	10G X 75	100	1000
DECKX1275BR100	DECKX1275BR	12G X 75	100	1000
DECKX1290BR100	DECKX1290BR	12G X 90	100	1000

T304 Flush Csk

PART CODE	BOX CODE	DESCRIPTION	PACK QTY	BOX QTY
DECKXCSK1060P100	DECKXCSK1060P	10G X 60	100	1000

T316 Flush Csk

PART CODE	BOX CODE	DESCRIPTION	PACK QTY	BOX QTY
DECKXCSK1060TP100	DECKXCSK1060TP	10G X 60	100	1000

T304 Flush Csk - Long

PART CODE	BOX CODE	DESCRIPTION	PACK QTY	BOX QTY
DECKX12100P100	DECKX12100P	12G X 100	100	1000
DECKX12120P100	DECKX12120P	12G X 120	100	1000

