

BRONZE NAILS

LENGTH	DIA. (MM)	5 KG	2 KG	500 G	100 G	APPROX NO. PER KG
FLATHEAD AG SILICONE BRONZE						
19 mm	1.60				•	2735
40 mm	2.80		•			438
50 mm	2.80	•		•		357
65 mm	3.15	•	•	•		217
75 mm	3.15	•	•	•		172
ROSEHEAD AG SILICONE BRONZE						
50 mm	2.80		•			357
65 mm	3.15		•			217
75 mm	3.15		•			172





STAPLES

LENGTH	DIA. (MM)	20 KG	5 KG	2 KG	500 G	APPROX NO. PER KG
BARBED						
27 mm	2.80		•	•		360
30 mm	3.15	•	•			260
40 mm	4.00	•	•			120
45 mm	4.00	•	•			120
50 mm	4.00	•	•			105
PLAIN						
19 mm	2.00		•			360
27 mm	2.80		•		•	360
30 mm	3.15	•	•			260
40 mm	4.00	•	•			120
50 mm	4.00	•	•		•	105



ROOFING

LENGTH	DIA. (MM)	15 KG	5 KG	2 KG	500 G	APPROX NO. PER KG
SUPERSEAL 12.5						
60 mm	4.00	•		•	•	115
75 mm	4.00	•		•	•	100
TWISTED SPRINGHEAD 12.5						
60 mm	3.15			•	•	150
75 mm	3.15			•	•	120



EXPOSURE ZONES

NZS 3604:2011 defines the zones as category A (very low), category B (low), category C (medium), category D (high) and category E (very high).


Category A is not applicable in New Zealand. Three exposure zones - zone B, zone C and zone D - are shown on a map of the North and South Islands.

The zones relate to the severity of exposure to wind-driven salt, with B being low risk, C medium risk and D high risk.

Zone D includes: all offshore islands, and the area within 500m of the coastline of New Zealand, including harbour the area within 100m of tidal estuaries and sheltered inlets. Building Code compliance document E2/AS1 (2011) includes an exposure zone E, which is beachfront regions subject to rough seas and surf beaches.

NZS 3604:2011 contains the comment: "For the purposes of NZS 3604, the corrosion protection requirements for structural fixings in exposure zones D and E are identical."

Microclimatic factors need to be considered in all locations.

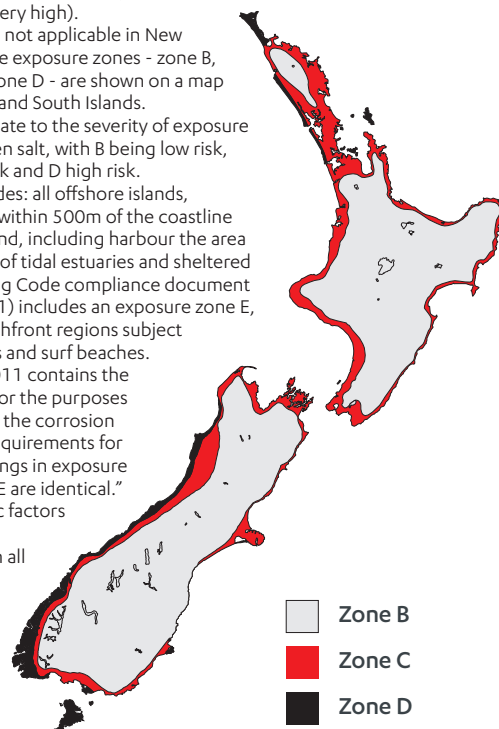

Zone B
 Zone C
 Zone D

The Hurricane range includes:

- Gates
- Gate Fittings
- Fencing Wire
- Fence Posts
- Deer Fence
- Home Fence
- School Fence
- Security Panel Fence
- Chain Link
- Staples & Barbed Wire



CONTACT US TODAY:
0800 478 335
www.steelandtube.co.nz

6ST166



6ST166



PRODUCT GUIDE
NAILS



PRODUCT GUIDE > NAILS

MAY 2018

RURAL & FENCING

For over 80 years Hurricane has provided a range of high quality, hard wearing products made to last in New Zealand's harsh environment.







BRIGHT NAILS

LENGTH	DIA. (MM)	15 KG	5 KG	2 KG	500 G	APPROX NO. PER KG
JOLT HEAD						
40 mm	2.00		•		•	930
50 mm	2.25		•	•	•	500
60 mm	2.80	•	•	•	•	330
75 mm	3.15	•	•	•	•	210
90 mm	3.55	•	•	•	•	138
100 mm	4.00	•	•	•	•	98
FLAT HEAD						
40 mm	2.00				•	905
50 mm	2.25		•	•	•	475
60 mm	2.80	•	•	•	•	320
75 mm	3.15	•	•	•	•	205
90 mm	3.55	•	•	•	•	132
100 mm	4.00	•	•	•	•	93





CLOUTS

LENGTH	DIA. (MM)	15 KG	5 KG	2 KG	500 G	APPROX NO. PER KG
GOLD CLOUT PLASTERBOARD AG						
30 mm	2.80	•	•	•	•	640
40 mm	2.80	•	•			500
GALVANISED CLOUT PLASTER BOARD						
25 mm	2.50				•	660
30 mm	2.50	•	•	•	•	570
40 mm	2.50	•	•	•	•	450
GALVANISED CLOUT UNDERLAY						
25 mm	2.50			•	•	780
GALVANISED CLOUT BRACKET						
30 mm	3.15		•	•	•	440



STAINLESS NAILS (316 GRADE)

LENGTH	DIA. (MM)	5 KG	2 KG	500 G	100 G	APPROX NO. PER KG
JOLT HEAD						
50 mm	2.80	•		•		
60 mm	3.15	•	•	•	•	270
75 mm	3.15	•	•	•	•	205
90 mm	4.00	•	•	•	•	132
100 mm	4.00	•	•	•	•	93
FLAT HEAD						
30 mm	2.80				•	1230
40 mm	2.80		•	•	•	
60 mm	2.80		•	•	•	
60 mm	3.15	•		•		330
75 mm	3.15			•		210
90 mm	4.00	•		•		110
100 mm	4.00			•		100
ROSE HEAD						
50 mm	2.80	•		•		
60 mm	3.15	•		•		270
75 mm	3.15	•		•		205
90 mm	4.00	•		•		132
100 mm	4.00	•		•		93
DECKING FLAT HEAD AG						
60 mm	3.15	•	•	•		255
75 mm	3.15	•	•	•		210
CLOUT FIBRE CEMENT						
40 mm	2.80	•	•	•		470
50 mm	2.80	•	•	•		375
CLOUT BRACKET						
30 mm	3.15	•	•	•		460
45 mm	3.15			•		?






PLATED PANEL PINS

LENGTH	DIA. (MM)	5 KG	2 KG	500 G	250 G	APPROX NO. PER KG
ZINC PLATED						
19 mm	1.60			•	•	3000
25 mm	1.60			•	•	2400
30 mm	1.60			•	•	2000
40 mm	1.60	•		•	•	1520
50 mm	2.00	•		•	•	780



GALVANISED NAILS

LENGTH	DIA. (MM)	15 KG	5 KG	2 KG	500 G	APPROX NO. PER KG
JOLT HEAD						
40 mm	2.00		•	•	•	840
50 mm	2.50		•	•	•	450
60 mm	2.80	•	•	•	•	300
75 mm	3.15	•	•	•	•	190
90 mm	3.55	•	•	•	•	125
100 mm	4.00	•	•	•	•	88
125 mm	5.30		•		•	45
150 mm	6.00				•	29
FLAT HEAD						
19 mm	1.60				•	2900
25 mm	1.60				•	2270
40 mm	2.00		•		•	815
50 mm	2.50		•	•	•	435
60 mm	2.80	•	•	•	•	295
75 mm	3.15	•	•	•	•	185
90 mm	3.55	•	•	•	•	122
100 mm	4.00	•	•	•	•	95
125 mm	5.30	•	•	•	•	42
150 mm	6.00	•	•	•	•	27
FLAT HEAD FIBRE CEMENT						
40 mm	2.80	•	•	•	•	432
50 mm	2.80	•	•	•	•	358
WEATHERBOARD BOARD						
60 mm	3.15		•		•	254



GALVANISED DECKING/FLOORING (ANNULAR GROOVED)

LENGTH	DIA. (MM)	15 KG	5 KG	2 KG	500 G	APPROX NO. PER KG
FLAT HEAD FLOORING AG						
60 mm	3.15	•	•	•	•	240
FLAT HEAD DECKING AG						
75 mm	3.15	•	•	•	•	195
FLAT HEAD PALING AG						
60 mm	2.80		•	•	•	260

