

DESIGNING FOR STEEL
ROOFING & CLADDING

COLORSTEEL® & Reflectivity

LIGHT REFLECTANCE &
SOLAR REFLECTANCE


colorsteel®


NEW ZEALAND
STEEL



A reflection of our exacting standards

There are two measures of light or solar reflectance that, on the surface, appear to refer to the very same thing. On closer inspection, however, it's clear they are used for quite different purposes.

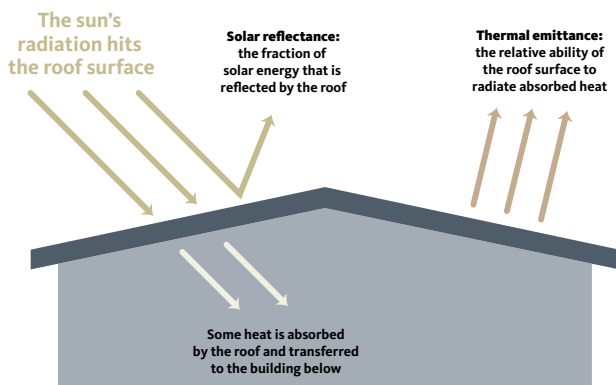

Total Solar Reflectance (TSR) measures the amount of solar energy across the entire spectrum that is reflected away from an object. This correlates closely to the temperature that the object will reach on a hot summer's day.

Light Reflectance Value (LRV) on the other hand, focuses solely on the total quantity of visible light that, when illuminated by a light source, is reflected by a surface in all directions and at all wavelengths. LRV runs on a scale from 0% (absolute black) to 100% (perfectly reflective white), with all other colours fitting within these extremes. With LRV of 0%, black absorbs all light. Pure white, conversely, has a light reflectance of 100% and absorbs no light. LRV is an indicator of how the human eye sees a colour and of that colour's brightness.

It's possible, therefore, to have colours that look the same and have the same or similar Light Reflectance Values, but which reach quite different temperatures in the sun. Equally, you could have two colours where one appears darker than the other, but both reach the same temperature when exposed to the sun.

The power of infrared reflectance technology

To determine the TSR of COLORSTEEL® prepainted steel colours, BlueScope (New Zealand Steel's parent company) had its research laboratories expose a sample of each colour to a full range of wavelengths between 250nm and 2500nm and then measured the reflectance at each 0.5nm step.

To obtain the LRV of prepainted steel colours, a full range of wavelengths, between 400nm and 800nm, was measured with a spectrophotometer and then weighted using the CIE Standard Observer methodology.

This data was then used by BlueScope and its suppliers to develop a range of pigments that reflect a larger proportion of the sun's energy in the near-infrared region.

This cutting-edge infrared technology was then incorporated into New Zealand Steel's COLORSTEEL® paint systems to deliver durability and measurable energy savings in both domestic and commercial situations¹.

IR technology now enables popular COLORSTEEL® colours such as Karaka and Ironsand to remain visually identical, while providing a cooler roof surface on hot summer days. The resulting energy savings are significant.

Cost-effective in summer

In summer, when the sun is at its most intense for greatly increased periods, extreme levels of solar energy land on a roof. Depending on the nature of the structure, this can produce a high level of heat within the building itself. This, in turn, often requires the near constant use of power-hungry electric cooling systems.

The IR technology present in COLORSTEEL® MAXX® and COLORSTEEL® ENDURA® enables a reduction in roof temperature, particularly in darker colours. This can moderate the temperature of the internal environment and reduce required cooling costs by as much as 20% when compared to roofing materials of a similar colour with low solar reflectance².

Of course, depth of colour has a major impact on a roof's heat levels. Specifying lighter colours undeniably reduces temperatures. However, building design and appropriate insulation can also affect this.

The Metal Roofing Manufacturers' (MRM) Code of Practice provides the following approximate temperatures that a lightweight metal roof can be expected to reach on a hot summer's day in New Zealand.

COLOUR DEPTH/INSULATION	DEGREES CELSIUS
Insulated dark colour	80°
Insulated light colour	60°
Uninsulated dark colour	65°
Uninsulated light colour	50°

In areas where aesthetic preference or local regulations dictate a darker colour, the use of COLORSTEEL® with IR reflectance will successfully lower roof temperatures by up to 8 degrees Celsius, depending on the colour.

Temperature-neutral in winter

In New Zealand's winter months, with the sun lower in the sky, greater cloud cover and shorter daylight hours, the effect of IR reflectance technology is reduced. Providing suitable design features (particularly around insulation) are in place, internal heat retention should not be an issue.

With an eye on the environment

Reduced LRV values may also prove helpful when meeting local authority guidelines in relation to the reflectivity of roofing and cladding materials. These restrictions are generally applied to coastal locations or other visually attractive or significant landmarks, with the aim of preserving the natural amenity and character of the area. In these instances, LRV will provide the best measure of visible reflectance.

REFLECTANCE MEASURES OF COLORSTEEL® PREPAINTED STEEL		
COLORSTEEL® COLOUR	TOTAL SOLAR REFLECTANCE %	LIGHT REFLECTANCE VALUE %
Anthracite	21	7
Azure	32	18
BasaltBase®	33	15
Bone White	58	54
Cloud	69	74
Desert Sand	56	49
Ebony	7	5
FernFron®	29	13
FlaxPod®	23	7
Grey Friars	26	10
Gull Grey	57	51
Ironsand	25	8
Karaka	25	8
KowhaiGlow®	56	52
Lichen	42	27
Lignite	29	11
Mist Green	40	25
New Denim Blue	25	11
Permanent Green	25	11
Pioneer Red	36	13
Rivergum	34	19
SandScape®	66	67
Sandstone Grey	42	27
Scoria	31	10
Slate	27	9
Smokey	42	28
Smooth Cream	68	72
Stone	48	35
Storm Blue	28	9
TernStyle®	29	12
Thunder Grey	29	12
Titania	65	70
TuiTuft®	71	78
Windsor Grey (G10)	21	7

1. Due to their pigment composition, Ebony, KowhaiGlow® and FlaxPod® cannot be produced with solar reflectance technology. Figures are also available for many non-standard colours. Please contact New Zealand Steel for more information.
2. Results depend on level of insulation, building shape and function. Average reduction is approximately 5%.

For more information about
NEW ZEALAND STEEL
products call **0800 100 523**
or visit **colorsteel.co.nz**

NOTE: Buyers and users of New Zealand Steel products and services must make their own assessment of the products for their own conditions. All queries regarding product specification, purpose or application should be directed to New Zealand Steel, phone 0800 100 523. New Zealand Steel reserves the right to modify products, techniques, equipment and statements to reflect improvements in the manufacture and application of its products. The information contained in this brochure is supplied without prejudice to New Zealand Steel's standard terms and conditions of sale. In the event of conflict between this information and the standard terms and conditions, the standard terms and conditions prevail. COLORSTEEL® is a registered trademark of New Zealand Steel.

Copyright© March 2017 New Zealand Steel.

